


Ulanzi VL119 RGB说明书

材质:80g书纸, 双面印刷
尺寸:45*85mm

Ulanzi



VL119 RGB LED补光灯

前言

感谢您购买Ulanzi产品

重要提示

请认真阅读本说明书
请妥善保管说明书,将产品交给他人使用时,请务必携带本说明书。
请注意所有警告提示并遵守说明书内的所有指令。

警告

请勿将本产品放置在有腐蚀性化学物质的地方,以免产品受到腐蚀,被腐蚀可能引起产品故障。

- 请用软布、干布清洁本产品。
- 本产品属于精密仪器,请避免使用时掉落、碰撞或承受重击。
- 请勿将本产品放置在温度过高的地方,高温可能导致产品内电池受损或爆炸。
- 需要维修时请联系授权的维修人员,本产品内有精密电子线路,未经许可擅自拆卸导致故障,不在本司保修范围内,但用户可以付费维修。
- 建议使用原厂配件。由于使用非原厂配件导致本产品任何损坏,不在本司保修范围内,但用户可以付费维修。
- 本产品已经过RoHS和CE认证,请参考相关国家标准使用和操作,因使用不当而造成机器损坏,不在保修范围内,但用户可以付费维修。
- 此说明书依据本公司严格测试制定,设计和规格如有变更,恕不另行通知。


设备的规范使用

- 仔细阅读本说明书,特别是“重要提示”部分。
- 在本说明书规定的工作条件下使用和保存本产品。
- 如不按本说明书使用产品,或不遵守规定的工作或保存条件,将被视为违规使用。

物品清单:

- VL119 RGB*1
- Type-C充电线*1

产品视图:

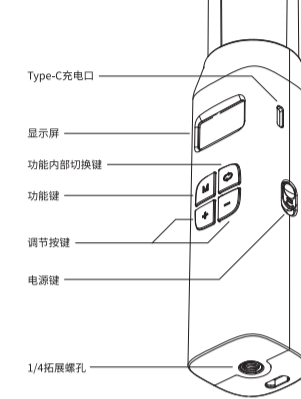


- Type-C充电口
- 显示屏
- 功能内部切换键
- 功能键
- 调节按钮
- 电源键
- 1/4拓展螺孔

操作说明:

1. 显示屏界面说明


CCT模式



当前电量
当前色温值
当前亮度

在CCT模式中,按下功能内部切换键,可切换色温和亮度
按下调节按钮,可调节当前数值
色温范围: 2500-9000K,亮度范围0-100%


RGB模式



当前电量
当前色相值
当前饱和度
当前亮度

在RGB模式中,功能内部切换键,可切换色相、饱和度和亮度
按下调节按钮,可调节当前数值
色相范围: 0-360°,饱和度范围: 0-100%,亮度范围0-100%

特效模式



当前电量
当前特效类别
当前亮度

在特效模式中,功能内部切换键,可切换特效类别和亮度
按下调节按钮,可调节当前数值
特效类别: 20种,亮度范围0-100%

2. 情景特效模式


序号	场景	Scenario	序号	场景	Scenario
1	警车	Cop Car	11	脉冲闪	Strobe
2	救护车	Ambulance	12	RGB闪光灯	RGB Strobe
3	消防车	Fire Engine	13	记者群闪	Paparazzi
4	闪电	Lightning	14	应急双闪	Emergency
5	烟花	Fireworks	15	高低光束灯	H/L Beam
6	电视	TV	16	红色闪光	Red Flash
7	蜡烛	Candle	17	绿色闪光	Green Flash
8	聚会	Party	18	蓝色闪光	Blue Flash
9	坏灯泡	Fault Bulb	19	HSI演示(慢)	HSI Slow
10	白色呼吸灯	Pulsing	20	HSI演示(快)	HSI Fast

规格参数:

型号	VL119 RGB	色温	2500-9000K	
灯珠	白色 38PCS 黄色 38PCS RGB 38PCS	持续 工作时间	最大亮度 ≥60min	
显指	CRI 95	功率	7.5W	
工作电压	3.7V	充电	Type-C	
电池容量	2600mAh	光照角度	120°	
照度	距离	0.3m	0.5m	1m
亮度	708LUX	344LUX	105LUX	
充电时间	充电约2小时			

*亮度数据为平均值,不同灯的亮度会有微小差异。

Ulanzi



VL119 RGB ICE LIGHT

Foreward

Thank you for purchasing the Ulanzi

Instructions

- Please read this product manual carefully.
- Keep this product manual. Always include this product manual when passing the products on to third parties.
- Heed all warnings and follow all instructions in this product manual.

WARNING

Do not place the product in a place where there are corrosive chemicals to protect the product from corrosion, corrosion may cause the product to malfunction.

- Use only a microfiber and dry cloth for cleaning the product.
- Operate carefully to not cause any damage by dropping or physical stacking it.
- Do not leave the product in excessive heat, high temperatures can cause the product to malfunction.
- Please have the product checked by the authorized service or agent if your product has some problems. Please note that this warranty does not apply to repair arising out of the malfunction of unauthorized disassembly, although you may request such repairs on a chargeable basis.
- Use of original Ulanzi cable accessories is recommended. Please note that this warranty does not apply to repairs arising out of the malfunction of non-original Ulanzi accessories, although you may request such repairs on a chargeable basis.
- The product is certified by RoHS and CE. Please operate the product in full compliance with the operation standards. Please note that this warranty does not apply to repair arising from malfunction, although you may request such repairs on a chargeable basis.
- The instructions and information in this manual are based on thorough, controlled company testing procedures. Further notice will not be given if the design and specifications change.


Intended Use

- The user has read the instructions of this manual.
- The user is using the products within the operating conditions and limitations described in this product manual.
- "Improper use" means using the products other than as described in these instructions or under operating conditions which differ from those described herein.

Packing List:

- VL119 RGB*1
- Type-C Cord*1

Product Overview:

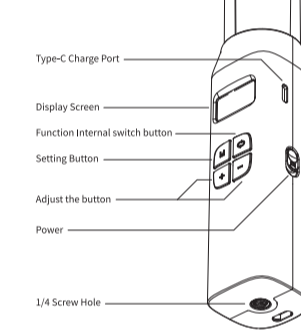


- Type-C Charge Port
- Display Screen
- Function Internal switch button
- Setting Button
- Adjust the button
- Power
- 1/4 Screw Hole

Instructions:

1. Display Zone


CCT Mode



Color Temperature
Brightness

In CCT mode, press the function internal switch button to switch the color temperature and brightness
Press the adjustment button to adjust the current value
Color temperature range: 2500-9000K, brightness range 0-100%


RGB Mode



Hue
Saturation
Brightness

In RGB mode, press the function internal switch button to switch the hue, saturation and brightness
Press the adjustment button to adjust the current value
Hue range: 0-360°, saturation range: 0-100%, brightness range 0-100%

Effect Mode



Current Effect
Brightness

In effects mode, press the function internal switch button to switch the effects category and brightness
Press the adjustment button to adjust the current value
Special effect categories: 20 types, brightness range 0-100%

2. Effects Mode


Numbers	Scenario	Numbers	Scenario
1	Cop Car	11	Strobe
2	Ambulance	12	RGB Strobe
3	Fire Engine	13	Paparazzi
4	Lightning	14	Emergency
5	Fireworks	15	H/L Beam
6	TV	16	Red Flash
7	Candle	17	Green Flash
8	Party	18	Blue Flash
9	Fault Bulb	19	HSI Slow
10	Pulsing	20	HSI Fast

Product Specification:

Model:	VL119 RGB	Color Temperature	2500-9000K	
Beads	White 38PCS Yellow 38PCS RGB 38PCS	Work Time	Strongest Brightness ≥60min	
CRI	95	Power	7.5W	
Voltage	3.7V	Charge Port	Type-C	
Battery Capacity	2600mAh	Beam Angle	120°	
Illuminance	Distance	0.3m	0.5m	1m
Brightness	708LUX	344LUX	105LUX	
Charging time	2h			

*The data of the light is on the base of average, slight difference shall exist among different lights

Ulanzi



VL119 RGB LED ライト

序文

Ulanziの製品をご購入いただきありがとうございます

ヒント

製品仕様をよくお読みください
仕様書は大切に保管してください。他人に使ってもらうとき、必ず本書も添付してご使用ください。
すべての警告に注意を払い、仕様書のすべての指示に従ってください。

警告

腐食を防ぐために、腐食性のある場所に本製品を置かないでください。腐食された場合は製品の故障を引き起こす可能性があります。

- 柔らかい布または乾いた布で製品を拭いてください。
- 本製品は精密機器ですので、使用中の落下、衝突、激しい打撃は避けてください。
- 温度が高すぎる場所に本製品を置かないでください。高温は、バッテリーの損傷や爆発を引き起こす可能性があります。
- これは保証範囲外ですが、ユーザーは自分で修理費用を支払います。
- Ulanziオリジナルのケーブルを使用することをお勧めします。オリジナルケーブルを使用することによる製品の損傷は、弊社の保証対象外ですが、ユーザーは自分で修理費用を支払います。
- 本製品は、RoHSおよびCEを取得しており、関連する国家標準使用および操作を参考してください。不適切な使用および操作による機械的損傷は保証の対象外ですが、ユーザーは修理費用を支払うことができます。
- この仕様書は、弊社の厳しいテストに基づいて作成されています。設計および仕様は予告なく変更される場合があります。


設備使用規範

- この仕様書、特に「ヒント」をよくお読みください。
- この製品は、仕様書で指定された作業条件下で使用および保管してください。
- この仕様書に従って使用されなかった場合、または指定された動作条件や保管条件に適合していない場合、違法な使用と見なされます。

製品リスト:

- VL119 RGB*1
- Type-C充電ケーブル*1

製品ビュー:

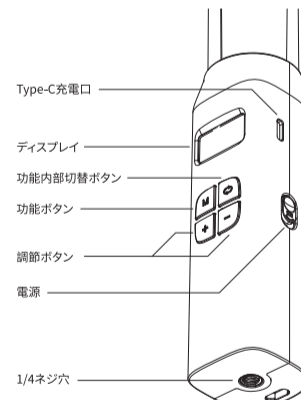


- Type-C充電口
- ディスプレイ
- 機能内部切替ボタン
- 機能ボタン
- 調節ボタン
- 電源
- 1/4ネジ穴

操作説明:

1. 表示界の説明


CCTモード



今の電量
今の色温度値
今の輝度

CCTモードでは、機能内蔵スイッチを押して色温度と明るさを切り替える
調節ボタンを押して、現在の値を調整する
色温度範囲: 2500~9000K, 輝度範囲: 0~100


RGBモード



今の電量
今の色相値
今の飽和度
今の輝度

RGBモードでは、機能内蔵のトグルボタンで、色相、輝度、色相を切り替えます。
調節ボタンを押して、現在の値を調整する
色相範囲: 0~360°, 色相範囲: 0~100%, 輝度範囲: 0~100

特殊効果モード



今の電量
今の特殊効果
今の輝度

特殊効果モードでは、機能内蔵のトグルボタンで、エフェクトのカテゴリと明るさを切り替えます。
調節ボタンを押して、現在の値を調整する
エフェクトカテゴリ: 20, 輝度範囲: 0~100

2. シナリオ特殊効果モード

番号	シーン	Scenario	番号	シーン	Scenario
1	警車	Cop Car	11	バルスフラッシュ	Strobe
2	救急車	Ambulance	12	RGBフラッシュ	RGB Strobe
3	消防車	Fire Engine	13	レポーターグループフラッシュ	Paparazzi
4	ライトニング	Lightning	14	緊急ダブルフラッシュ	Emergency
5	花火	Fireworks	15	ハイビーム/バルブとロービーム	H/L Beam
6	テレビ	TV	16	赤点滅	Red Flash
7	キャンドル	Candle	17	緑点滅	Green Flash
8	パーティー	Party	18	青点滅	Blue Flash
9	電球	Fault Bulb	19	HSI(遅い)	HSI Slow
10	バルス	Pulsing	20	HSI(高速)	HSI Fast

仕様:

型番	VL119 RGB	色温度	2500-9000K	
ビーズ	白い 38PCS 黄色 38PCS RGB 38PCS	動作時間	最大亮度 ≥60min	
演色性	95	効率	7.5W	
動作電圧	3.7V	充電	Type-C	
電池容量	2600mAh	光照角度	120°	
照度	距離	0.3m	0.5m	1m
輝度	708LUX	344LUX	105LUX	
充電時間	充電約2時間			

※明るさデータは平均値です。ランプによって明るさが若干異なります。



获取更多
售后服务

contact us:
service@ulanzi.com